

# PRODUCT INFORMATION



PTO PI1510.1\_GB

## „Z“ sliding ring for optional ST/STC/SD/SC and PG guard mounting

Use of „Z“ sliding rings (red/green) for mounting the guard tube in conjunction with different profile tube versions

The „Z“ sliding rings come in two colours (red/green) for different profile tube versions. An additional supporting ring on the profile tube is required for all red „Z“ sliding rings, for profiles 1, 1G, 2a, 2aG and S5. Specifically for the S5 profile tube, the profile had to be partially turned down to 57.7 mm for mounting the supporting ring.

The new green „Z“ sliding rings now rest directly on the S5 profile tube. The supporting ring and turning-down of the profile tubes are no longer necessary.

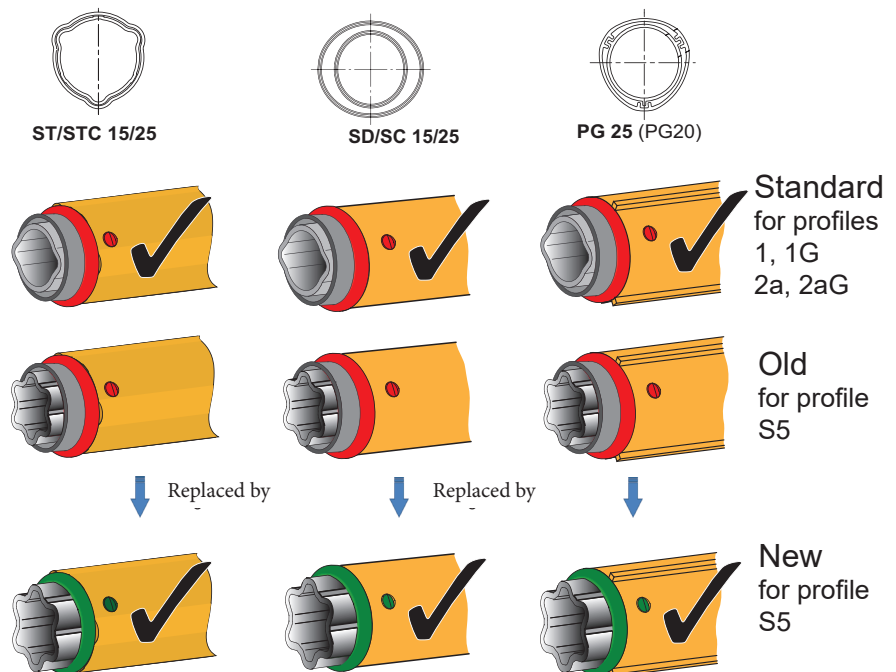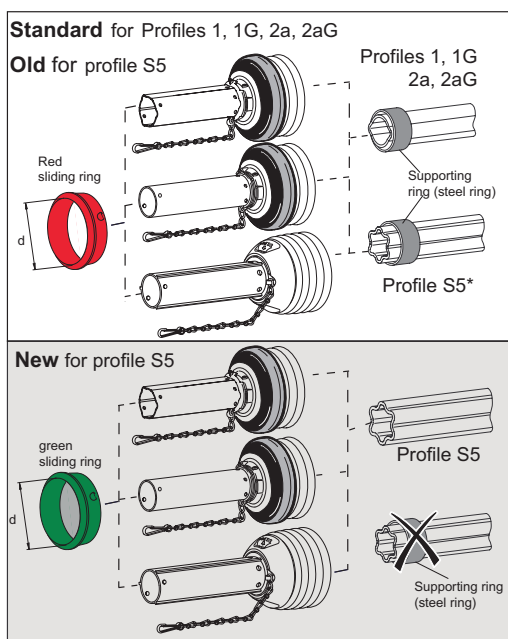

	Guard	Profile						Supporting ring			Sliding ring			
		Profile 1	Profile 1G	Profile 2a	Profile 2aG	Profile S5	Hub Ø 75	Drawing No.	Order-No.			d [mm]	Drawing No.	Order-No.
1	ST/STC/SD/SC15	x	x					16.20.74	1381621	→	SD15Z (red)	52	82.83.106	1355154
2	ST/STC/SD/SC 25			x	x	(x)*		16.20.71	1381284		SD25Z (red)	63	82.83.107	1355155
3	ST/STC/SD/SC 25					(x)*		16.20.191	1198509***		SD25Z (green)	62	82.83.115	1158845
4	ST/STC/SD/SC 25					x		-	-		SD35Z (red)	76	82.83.108	1355156
5	SC/SD 35						x	-	-		PG20-25Z (red)	67	82.83.111	1122376
6	PG25 (PG20)			x	x	(x)*		16.20.38	1123099		PG20-25Z (green)	62	82.83.123	1601934
7	PG25 (PG20)					(x)**		16.20.238	1158831					
8	PG25 (PG20)					x		-	-					

\* Old version

\*\* Old version – no turning-down required

\*\*\* Old version – slitted ring