# Z-SLIDING RING ARRANGEMENT FOR PTO DRIVE SHAFTS WITH PTO DRIVE SHAFT GUARD ST15 AND ST25

Overview of PTO drive shaft lengths Lz that requires the installation of an intermediate bearing.

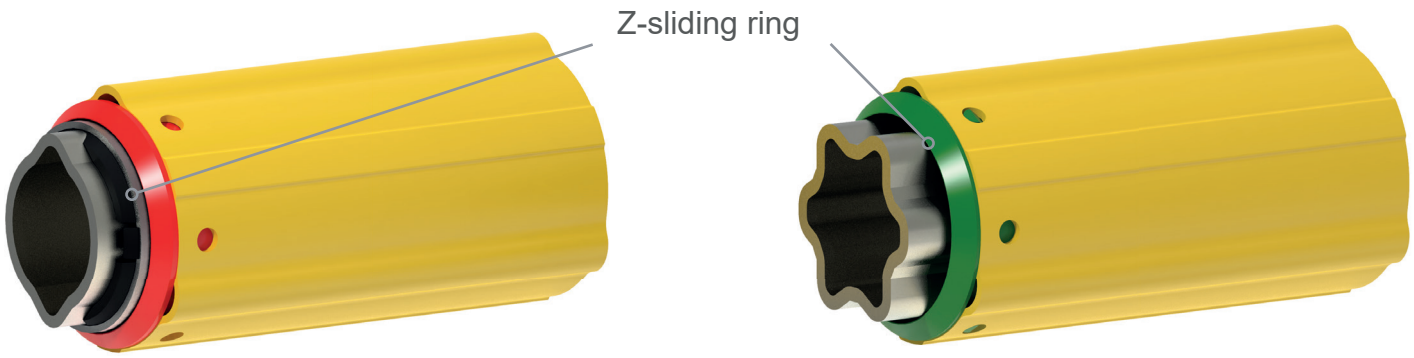


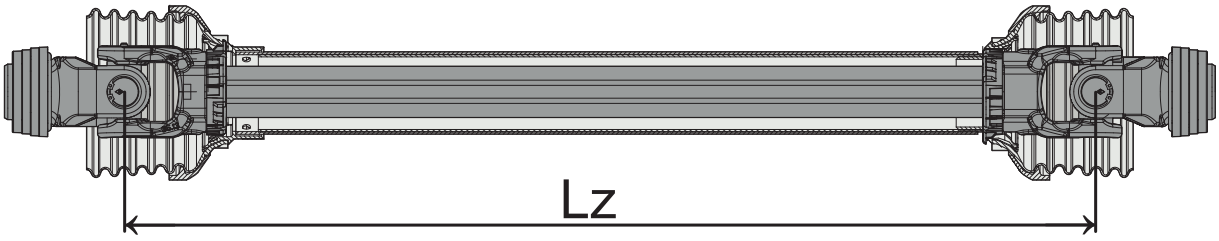


| | Z-sliding ring required for **ST15** | | Z-sliding ring required for **ST25** | |
|---|---|---|---|---|
| profile type | rotational speed | | rotational speed | |
| | 540 $min^{-1}$ | 1000 $min^{-1}$ | 540 $min^{-1}$ | 1000 $min^{-1}$ |
| 0v / 1 | Lz ≥ 1100 mm | Lz ≥ 900 mm | | |
| 1b / 2a | | | Lz ≥ 1000 mm | Lz ≥ 900 mm |
| S4 / S5 | | | Lz ≥ 900 mm | Lz ≥ 800 mm |



Walterscheid GmbH | Hauptstraße 150 | D-53797 Lohmar
Tel.: +49 2246 12-0 | Fax: +49 2246 12-3501
www.walterscheid.com